

# TracFeed® OSS

English



Overhead Conductor Rail

## OVERHEAD CONDUCTOR RAILS FROM RAIL POWER SYSTEMS – THE TIGHT-SPACE SOLUTION

Due to their significantly lower system construction heights, overhead conductor rails are used in confined spaces if there is not enough installation space for a traditional catenary. This can be the case with the conversion and retrofitting of older tunnel structures, for example. For travel speeds of up to 250 km/h, overhead conductor rails are already a space-saving alternative to the existing overhead contact lines in tunnels. The system also offers a high level of safety. In maintenance halls, the overhead conductor rail can also be installed in a swivelling design in order to keep the work range in the vehicle roof area free. Swivelling designs can also be used for bascule and lift bridges as well as loading/unloading systems.

### Approved, safe, and TSI-compliant

The TracFeed® OSS overhead conductor rail from Rail Power Systems has been approved by Eisenbahn-Cert (EBC, notified body), which is responsible for certification under EU law, for all lines in the interoperable, cross-border network of the European Union as per TSI (Technical Specifications of Interoperability) Energy and is now being used by various operators, from long-distance and local transport to maintenance facilities. The TracFeed® OSS overhead conductor rail has been certified or approved by the following institutions and operators, among others:




Eisenbahn-Cert



Deutsche Bahn AG



Network Rail



Eisenbahn-Bundesamt



Bundesamt für Verkehr



### A one-stop shop – Services and products

Rail Power Systems operates in the railway equipment market as a system supplier for overhead conductor rails and provides the following services for its customers with the customary high quality standard:

- System design for overhead conductor rail and catenary
- Development, construction, planning
- Material supply
- Supervision
- Installation
- Acceptance
- Commissioning

Rail Power Systems supplies a number of products for the overhead conductor rail (e.g. supports, expansion joint devices, clamps) from its own in-house production.

## Screwed on and without tensile stress

The TracFeed® OSS overhead conductor rail is a relatively rigid contact line system made of extruded aluminium profiles which, in addition to its large electrical cross section, also offers considerable breaking strength and safety with low maintenance and servicing requirements. The profiles are connected to each other by means of internal positive-locking connecting plates.

The contact wire is clamped into the profile following assembly of the overhead conductor rail and does not require any additional termination. The system is therefore free of mechanical tensile stress. In principle, every grooved contact wire as per EN 50149 is suitable as a contact wire..

### Technical data

Cross-sectional area	2 220 mm <sup>2</sup>
Equivalent copper cross section area	1 400 mm <sup>2</sup>
Profile heights	80 mm, 110 mm, 130 mm
Delivery lengths***	10 m, 12 m
Mass of the profile	6.1 kg/m
Maximum designated speed	up to 250 km/h*
Support intervals	up to 14 m
Max. length of a continuous section	2 x 450 m
Rated voltages	750 V DC – 3 000 V DC 15 kV AC – 25 kV AC
Constant current load capacity	4.0 kA**

\*\*\* Standard lengths, others available on request.

\* Dependent on the chosen profile height.

\*\* Dependent on the temperature range.


## Simple, robust, and high-current

The maximum standard longitudinal support widths of the TracFeed® OSS overhead conductor rail from Rail Power Systems are up to 14 m, depending on the intended operating speed and the chosen profile. Where the following applies: The higher the speed, the shorter the longitudinal span length.

Rail Power Systems offers different profiles:

- **Wash hall** profile – this profile does not require an inserted contact wire, thereby eliminating the cause of galvanic corrosion between the copper contact wire and the aluminium profile near the partially aggressive atmosphere caused by the cleaning agents used.
- The profile with a height of **80 mm** is used in very confined spaces that require a very low construction height.
- The profile with a height of **110 mm** is the traditional and most common form. The profile is suitable for speeds up to 200 km/h.
- The profile with a height of **130 mm** allows larger standard longitudinal support widths and, consequently, higher speeds due to the higher geometrical moment of inertia.

### OSS profiles

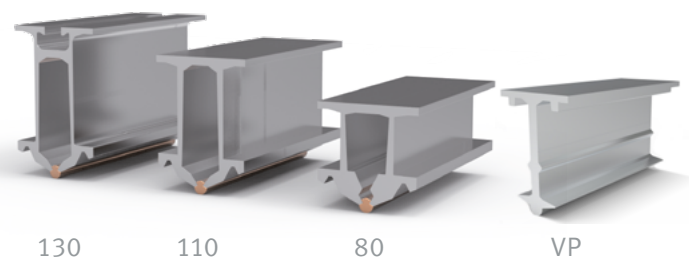

Parallel line feeders are not required due to the high copper equivalent cross section area. High continuous currents up to 4.0 kA can also be implemented with this system.

Tests have confirmed that a rated short-circuit current of 47.5 kA/114 ms and a rated surge current of 120 kA can be carried by the system (see Fig.).





## FLEXIBLE ALL ALONG THE LINE – CONDUCTOR RAIL WITH EXPANSION COMPENSATION

Simple, reliable, and robust: These construction characteristics of the TracFeed® OSS overhead conductor rail from Rail Power Systems can be most clearly seen in its mechanical design. Rail Power Systems divides the conductor rail system into sections of maximum 900 m. These are fixed at half length by a midpoint. The individual sections overlap by a few metres in the transition areas. Here, the bent-up end pieces of the sections make it easier to travel over them with the current collector and, due to the parallel arrangement, enable length compensation in the event of a temperature change.

Expansion joint devices can be used as an alternative to arrangement of a parallel panel. Here, the relevant adjacent sections are directly connected to each other by means of plain bearings and the conductor rails can move against each other. This allows the current collector to pass through the expansion joint not only without interruption, but also without virtually any offset on one line, even at high speeds.

### Assembly



The expansion joint device is integrated in the system via a standard splice connection.

### Inspection, service

- Maintenance-free
- Easy visual inspection

### Technical data

Compensation distance	1 000 mm
Mechanical dimension (L x W x H)	4 000 x 171 x 158 mm
Weight	approx. 57 kg

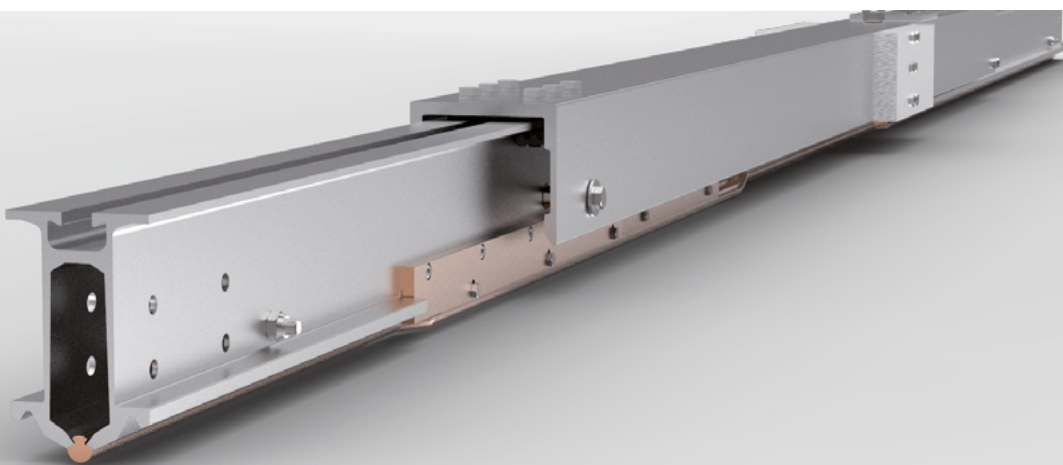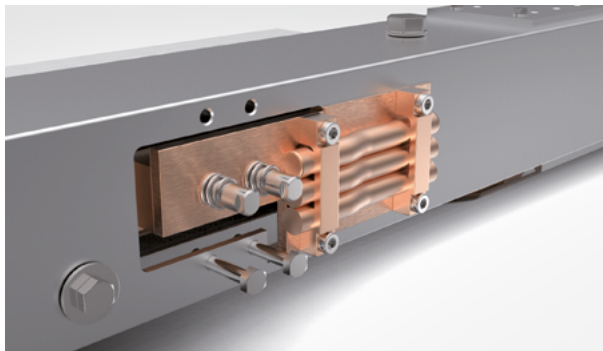

## IF YOU NEED SOME SPACE – SWIVELLING VARIANTS

Rail Power Systems has supplied and installed swivelling variants of the TracFeed® OSS overhead conductor rail in various maintenance facilities (including in Germany, Norway, and Switzerland). Due to the very specific spatial requirements on the one hand and the requirements of the operator on the other, each system is a customised solution. The implementation of these requirements places considerable demands on design and planning, and on the conception of suitable control systems.

### Application area

- Maintenance halls and depots for trams, urban railways, railway or high-speed trains.
- The TracFeed® OSS overhead conductor rail system enables trains to enter and exit with the conventional pantographs without additional traction units and, in retracted position, enables risk-free access to the train roof for maintenance work.
- In the swivelled-in position, crane work can be performed above the tension area. In the swivelled-out position, the overhead conductor rail facilitates vehicle testing and maintenance.

### Characteristics

- Synchronising all swivel arms with an efficient system makes it possible to retract and extend the installation in approx. 1 min.
- All arms are driven by motors with torque limiters (sliding clutch) and stopped if there is unexpected resistance. Arm lengths up to 6 m can be implemented.
- High level of safety thanks to the rigid profile of the overhead conductor rail, the automatic earthing, and the key locking system for all cranes, ladders, platforms, and lifting equipment.
- In the event of a power failure, there is the option of moving the swivelling overhead conductor rail to the required position manually.

### An overview of the facts

Motor speed	1 000 rpm
Speed control	Frequency controll
Rated output per motor	0.37 kW
Max. cantilever length	1 to 6 m
Overhead contact line voltage	750 V DC – 3 000 V DC 15 kV AC – 25 kV AC
Max. distance between cantilevers	12 m




## TRIED AND TESTED IN PROJECTS

The TracFeed® OSS overhead conductor rail systems from Rail Power Systems have been proving their worth for many years in various tunnel constructions (e.g. the Gemmenich Tunnel, the Leipzig City Tunnel (Germany), the Zurich Cross-City Link (Switzerland) or the Thameslink London (UK), and future constructions in Stuttgart as part of S21, as well as numerous maintenance halls in Germany, Norway, Switzerland, Turkey, and the USA.

### Plochingen, Germany

In the workshop at DB Regio AG's Plochingen railway depot, track 604 is equipped with an overhead contact line system in the form of a TracFeed® OSS overhead conductor rail. The track is split into two work ranges. The infeed for the two overhead contact line sections is via indoor track switches. Each overhead contact line section is to be switched separately and secured against unintentional reconnection. The overhead contact line sections are disconnected by a section insulator. In both sections, the overhead conductor rail can be electrically swivelled over a length of 31.5 m. This allows the current collector of the electric trainsets to be lifted for inspection.

The trains can be operated electrically and can enter the workshop under their own power. The overhead conductor rail is energised as a result. Work on the trainsets may only be performed when the overhead conductor rail is switched off and de-energised. An automatic disconnection and earthing system was built for track 604 for this purpose. The control system supervises the access doors to the roof maintenance platform, the lifting system, and the swivelling part of the overhead conductor rail. The crane, the fall-arresting equipment on the front, and the earthing on the roof maintenance platform retain their function. They are released from the control panel with a key.

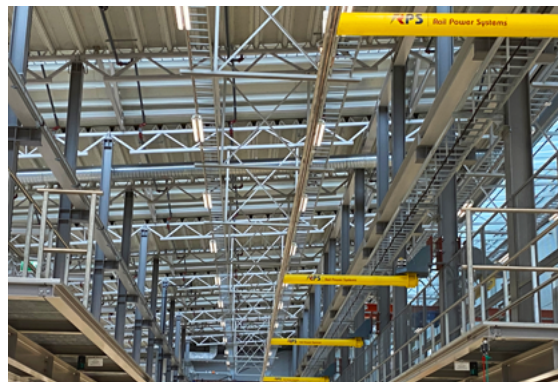








City Tunnel Leipzig, Germany



Cross-City Link Zurich, Switzerland

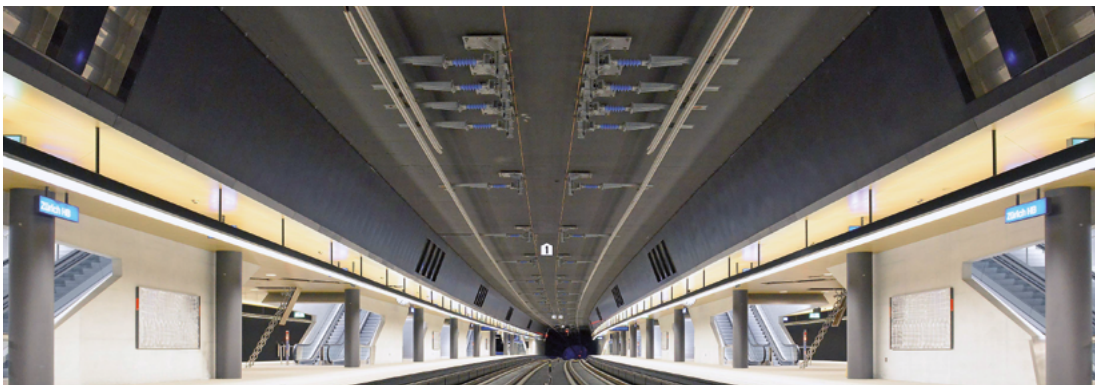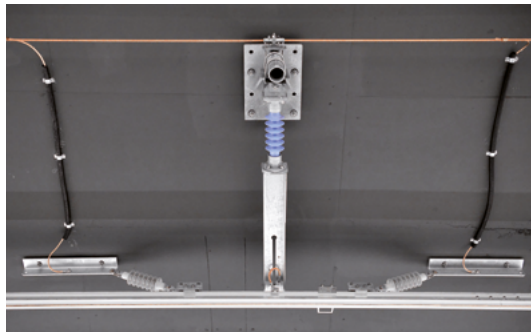



© 2022. All rights reserved by Rail Power Systems GmbH.

The specifications set out in this document apply to conventional applications. They do not represent performance limits. This means that divergent specifications may be attained in specific applications. The contractually agreed specifications alone shall apply. We reserve the right to effect technical modifications. TracFeed® is a registered trademark of Rail Power Systems GmbH.